

IP2600V ▼ IP4000V

CAMERA FEATURES

The Anvil™ IP-V interior cameras from AngelTrax feature a fully articulated lens casing, adjustable vertically and horizontally, to obtain the desired view of the vehicle's interior and passengers. Equipped with 14 infrared LED lights, automated white balance and digital noise reduction, IP-V cameras are capable of capturing astonishingly clear images day or night.

DIMENSIONS

- Height: 2.4 inches
- Width: 4.3 inches
- Depth: 4.3 inches
- Weight: 0.9 pounds

LENS

- 2.6mm or 4.0mm focal length
- 2MP
- CMOS sensor
- M12

MINIMUM ILLUMINATION

- Color: 0.05 Lux, F1.2
- B/W: 0 Lux, F1.2

INFRARED

- Range: ≤16.4 feet
- 14 IR LED lights

IMAGE CONTROL

- Digital Wide Dynamic Range (WDR)
- White Balance
- Automatic Gain Control
- Back Light Compensation (BLC)
- Image Mirror

ELECTRONIC SHUTTER

- 1/50s - 1/100,000s

DIGITAL NOISE REDUCTION

- 2D/3D

SIGNAL TO NOISE RATIO

- S/N >60db



BIT RATE

- 32Kbps-6Mbp
- Supports VBR/CBR
- Default: 4Mbps

VIDEO COMPRESSION

- H.264

IMAGE RESOLUTION

- NTSC: 1920 x 1080

IMAGE FRAME RATE (DUAL STREAM)

- Mainstream: Maximum 1080P@30fps
- Substream: Maximum VGA/CIF/D1@25fps

IMAGE SETTINGS

- Chroma
- Contrast
- Saturation
- Sharpness

NETWORK PROTOCOL

- TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, QoS (SIP, SRTP, IPv6)

AUDIO

- G.711A/G.711U/ADPCM

ONSCREEN DISPLAY (OSD)

- Supported

OPERATING CONDITIONS

- -40°F ~ +158°F (-40° C ~ +70°C)
- 0% - 90% humidity

POWER SUPPLY

- PON (DC 12V)

POWER CONSUMPTION



- ≤3.0 W (with IR ON)

IP RATING

- IP66

HOUSING/CASING MATERIAL

- Aluminum alloy
- Anti-vibration
- Vandal-resistant

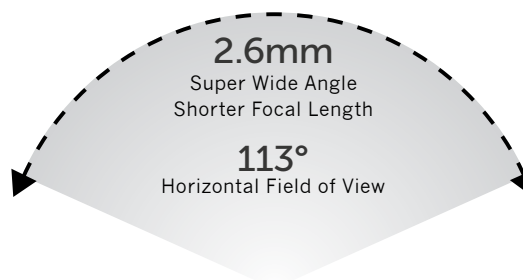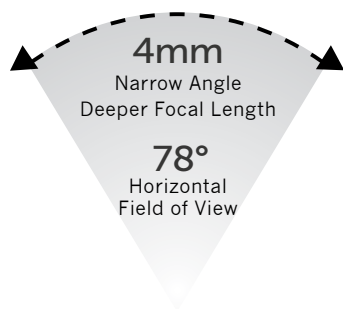

3/2017 - Specifications, features and applications of use are subject to change without notice.